



CLADDING

INFORMATION SHEET

OVERVIEW

Diamond Doors offers an optional cladding package. Our standard cladding is 28 gauge $\frac{3}{4}$ " profile, with the $\frac{3}{4}$ " rib spaced every nine inches. Each sheet provides 36" wide coverage and is cut to length prior to shipping for easy installation.

We offer a wide variety of standard cladding colours for each project. Custom colours to match your building are available upon request when provided with a colour code or QC number.


If you are purchasing a door for a new build, Diamond Doors recommends providing cladding to match your building. We will provide a detailed cut-list with your quote. This cut-list specifies the number of sheets required, along with the required length to install your cladding.

TECHNICAL SPECS

Standard Cladding Gauge: 28
Standard Cladding Profile: $\frac{3}{4}$ "
Standard Cladding Rib Spacing: 9"

WARRANTY

The door is free of manufacturing defects in material and workmanship for a period of two years. The door will not warp, crack, or buckle under normal intended use as a door.

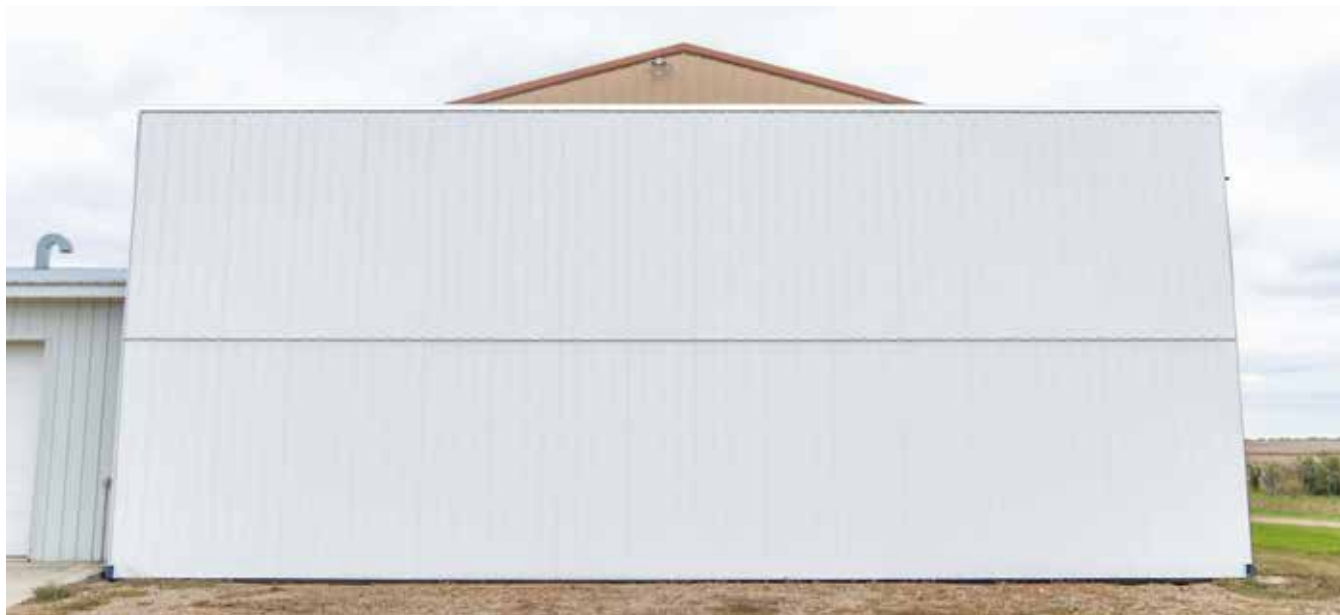

FREQUENTLY ASKED QUESTIONS

Do I need to provide my own door cladding?

We offer an optional cladding package for your bi-fold door. We can match your building colours when provided with a colour code. You can also provide your own if you want to use the same cladding as your building.

