



## TRIM PACKAGE

## INFORMATION SHEET

### OVERVIEW

The trim package covers the edges of the cladding and is both aesthetically pleasing and functional. Each Diamond door requires 3 types of trims; “J” trim, center trim, and drip trim. The “J” trim runs along both sides of the door and along the top. The center trim is placed on the top of the bottom section of the door (it works with the 3/4” cladding overlap). The drip flashing is fastened to the bottom of the door providing proper moisture shed.



The trims are typically made from 26-gauge material. Trim depth is determined by the thickness of the insulation and profile of cladding used. For standard trim colours available, please refer to the Diamond Doors colour chart. Custom colours are available upon request. If you prefer to supply your own trims to better match your building colours, Diamond Doors provides the trim profiles and required amounts on each order.

### TECHNICAL SPECS

Colour: See colour chart  
Trim Thickness: 26-gauge

### WARRANTY

The door is free of manufacturing defects in material and workmanship for a period of two years. The door will not warp, crack, or buckle under normal intended use as a door.

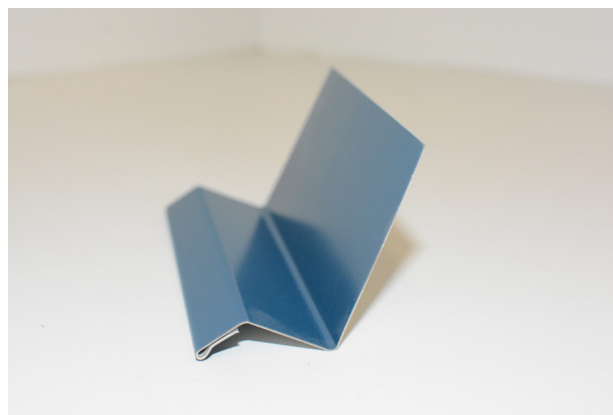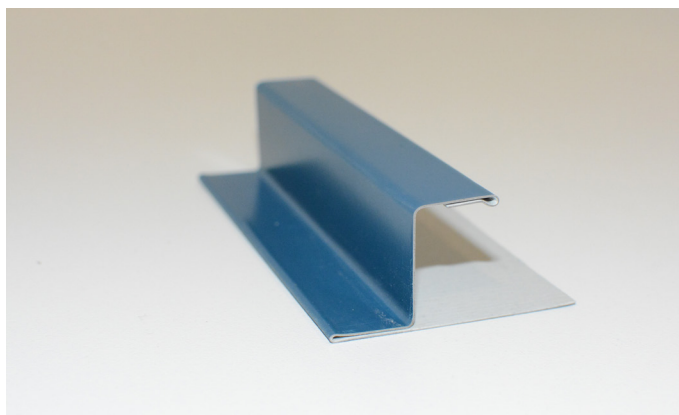

### FREQUENTLY ASKED QUESTIONS

**Can I provide my own trims?**

Yes, you can get your door trims from your building supplier. Diamond Doors can provide the trim profiles and required amounts.

**Can I customize my trim colours?**

We have a variety of colours available (see colour chart). Custom colours are also available upon request. We can match your trims to your cladding colour, or help you select a contrasting colour for aesthetic appeal.

